


RT120 Retention Tanks

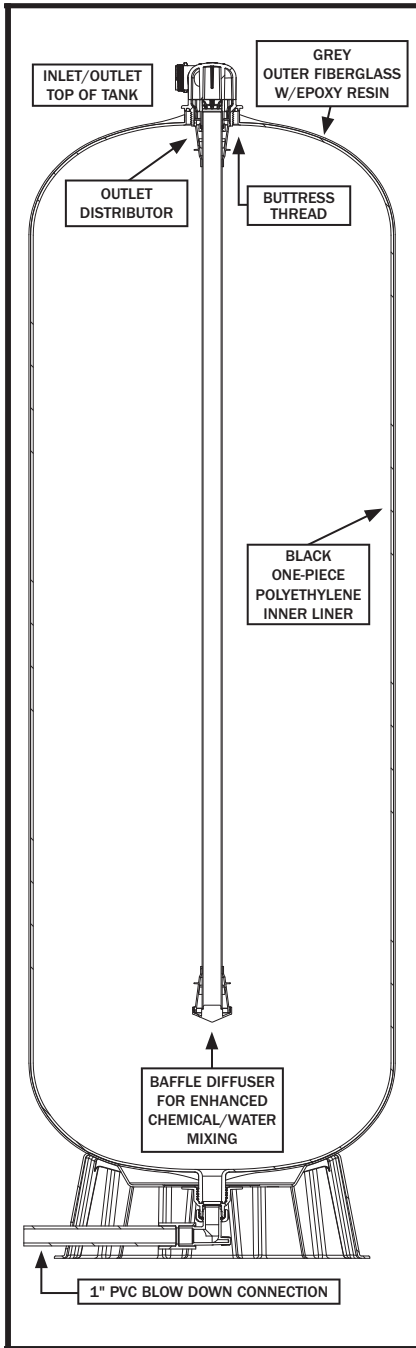

FEATURES:

- Convenient Inlet/outlet piping connection at the top of the tank
- Inlet/Outlet Adapter easily accommodates the use of a vacuum breaker
- Inlet/outlet Buttress tread for strength
- Bypass valve option available
- Full 1" blow down drain at lowest point of tank
- 360° degree drain orientation
- Black one piece polyethylene liner for impact and corrosion resistance
- Made from NSF Listed and/or FDA compliant materials

SPECIFICATIONS:


- Maximum Operating Pressure 75 psi/517 kPa
- Maximum Operating Temperature 120°F 49°C

POSITION HANDLES ON OPTIONAL BYPASS:

Orient the red handles on the bypass to point as shown below by lifting red arrow handles straight off by bypass valve and replacing the proper position.

FITTINGS INCLUDED:

1 1/4" x 1 1/2" PVC Straight Solvent Fitting Kit and
1 1/4" Plastic Straight Male NPT Fittings

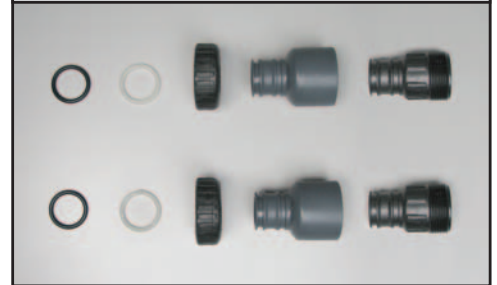


OPTIONAL:


Bypass



Order No. BP2000

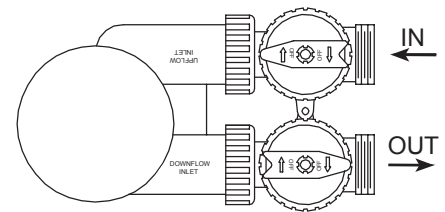

UPFLOW - ON

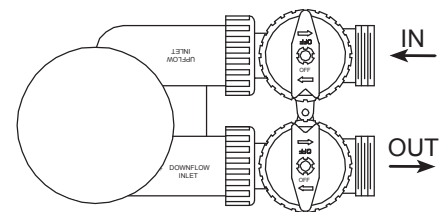

UPFLOW - OFF

LANCASTER®
WATER TREATMENT

A DIVISION OF C-B TOOL CO.

1340 MANHEIM PIKE • LANCASTER PA 17601-3196 • TEL: 717-397-3521 • FAX: 717-392-0266

www.lancasterwatertreatment.com • E-mail: info@lancasterpump.com