


1.25" CARTRIDGES

MODEL NUMBER	SERVICE FLOW RATE (GPM)	PIPE SIZE (IN.)	MICRON	TREATMENT
CT-1005	30	1.25	10 Outer / 5 Inner	Reduces silt, rust, and other particulates
CT-2010	30	1.25	20 Outer / 10 Inner	
CT-5020	30	1.25	50 Outer / 20 Inner	
CT-2050-SWMB	30	1.25	20 Outer / 5 Inner	Reduces silt, rust, and other particulates
CT-5020-SWMB	30	1.25	50 Outer / 20 Inner	
CT-03-CB	30	1.25	3	Remove organic chemicals Remove color, taste, and odor problems Removes chlorine residuals
CT-20-CB	30	1.25	20	
CT-03-CB-ANIME	30	1.25	3	Remove organic chemicals Remove color, taste, and odor problems Removes chlorine and chloramine residuals
CT-20NANO-AG	45	1.25	20	Reduces scale, ferric iron, bacterial iron slime, colloidal solids, silt, rust and other particulates
CT-20NANO-PAC-AG	45	1.25	20	Reduces scale, ferric iron, bacterial iron slime, colloidal solids, silt, rust and other particulates Remove organic chemicals Remove color, taste, and odor problems Removes chlorine residuals

*Dimensions for estimating purposes

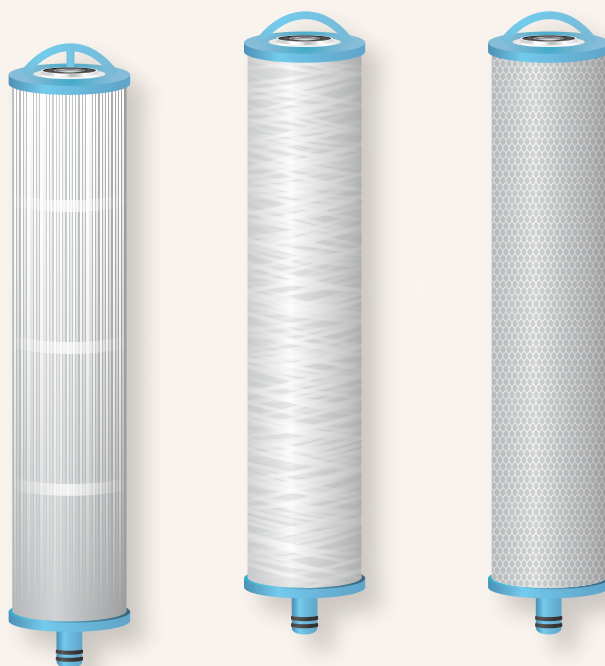

2" CARTRIDGES

MODEL NUMBER	SERVICE FLOW RATE (GPM)	PIPE SIZE (IN.)	MICRON	TREATMENT
CT-PIA	50	2	1 Absolute	Reduces silt, rust, and other particulates
CT-P05	100	2	5	
CT-P20	150	2	20	
CT-COMM50	150	2	50	
CT-COMMI50	150	2	150	
CT-COM-CARBP	15	2	Activated Carbon	Remove organic chemicals Remove color, taste, and odor problems Removes chlorine residuals
CT-D05	100	2	5	Reduces silt, rust, and other particulates
CT-D20	100	2	20	

*Dimensions for estimating purposes

