



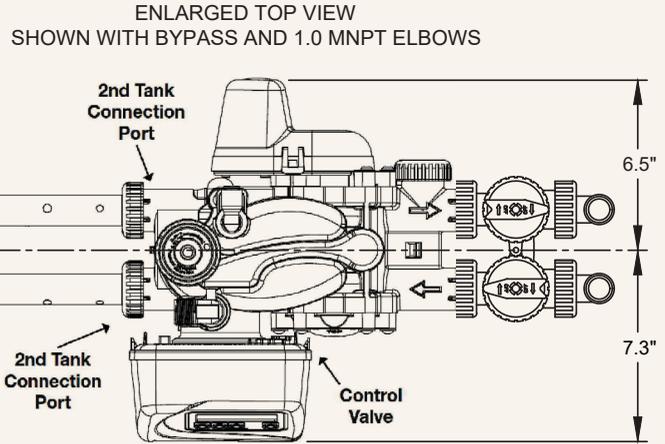

# LANCASTER WATER TREATMENT

DIAMOND LINE TTLX-NB - NITRATE CONDITIONERS

## X-FACTOR SERIES TTLX-NB NITRATE CONDITIONER

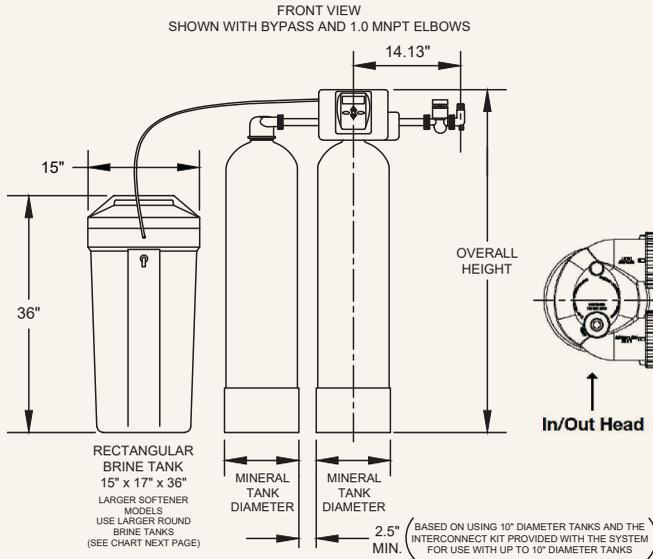

		WATER AVAILABLE TO SERVICE DURING REGENERATION							
TTLX-NB PROGRAM CYCLES <sup>1</sup>		TWIN TANK NITRATE CONDITIONER							
Model Number		7-TTLX-200NB		7-TTLX-300NB		7-TTLX-400NB		7-TTLX-600NB	
		Minutes	Gallons <sup>2</sup>	Minutes	Gallons <sup>2</sup>	Minutes	Gallons <sup>2</sup>	Minutes	Gallons <sup>2</sup>
1st: Fill - (Programmed in LBS Salt)	Treated Water	6.67	3.33	10.00	5.00	13.33	6.67	20.00	10.00
		10 LBS		15 LBS		20 LBS		30 LBS	
2nd: Softening (Minutes)	Treated Water	240	0	240	0	240	0	240	0
3rd: Backwash (Minutes)	Treated Water	10	10	10	10	10	13	10	22
4th: Regenerant Draw DN & Slow Rinse (Minutes)	Treated Water	50	18.5	50	18.5	50	26	50	36
5th: Backwash (Minutes)	Treated Water	10	10	10	10	10	13	10	22
6th: Rinse (Minutes)	Treated Water	5	5	5	5	5	6.5	5	11
7th: End	-	-	-	-	-	-	-	-	-
DLFC - Drain Line Flow Control (GPM)	-	1.0		1.0		1.3		2.2	
Total Gallons to Drain <sup>2</sup>	-	46.8		48.5		65.2		101.0	
Total Regeneration (Minutes)	-	321.7		325.0		328.3		335.0	
Total Time Untreated Water is Available to Service During Regeneration (Minutes)	-	0.0		0.0		0.0		0.0	

<sup>1</sup> Downflow Regenerant, Prefill Factory Program Settings

<sup>2</sup> Gallons to Drain Based on 50 PSI Inlet Pressure



## X-FACTOR SERIES TTLX-NB NITRATE CONDITIONER

TTLX-NB SPECIFICATIONS	TWIN TANK NITRATE CONDITIONER			
Model Number	7-TTLX-200NB	7-TTLX-300NB	7-TTLX-400NB	7-TTLX-600NB
Inlet/Outlet Fitting Options (Inches) <sup>1</sup>	0.75 - 1.0 <sup>1</sup> - 1.25 - 1.5	0.75 - 1.0 <sup>1</sup> - 1.25 - 1.5	0.75 - 1.0 <sup>1</sup> - 1.25 - 1.5	0.75 - 1.0 <sup>1</sup> - 1.25 - 1.5
Built-In Meter Included	No	No	No	No
Bypass Included	Yes	Yes	Yes	Yes
Built-In Motorized Alternating Valve	Yes	Yes	Yes	Yes
Drain Fit. Elb. NPT or OD Poly Tube Size (Inches)	3/4 NPT or 5/8 Tube	3/4 NPT or 5/8 Tube	3/4 NPT or 5/8 Tube	3/4 NPT or 5/8 Tube
Water Pressure Range (PSI)	20 - 100	20 - 100	20 - 100	20 - 100
Water Operating Temperature Range (°F)	35 - 100	35 - 100	35 - 100	35 - 100
Influent Water Hardness (GPG)	≤ 4	≤ 4	≤ 4	≤ 4
Influent Iron (PPM)	< 0.3	< 0.3	< 0.3	< 0.3
Influent Manganese (PPM)	< 0.05	< 0.05	< 0.05	< 0.05
Plug-In Power Adapter Input (VAC - Hz - A)	120V AC - 60Hz - 0.35A	120V AC - 60Hz - 0.35A	120V AC - 60Hz - 0.35A	120V AC - 60Hz - 0.35A
Plug-In Power Adapter Output (VDC - A)	15V DC - 0.5A	15V DC - 0.5A	15V DC - 0.5A	15V DC - 0.5A
Plug-In Power Adapter Cord Length	15 FT	15 FT	15 FT	15 FT
PC Board Relay Terminal Block DC Output (V)	12V DC	12V DC	12V DC	12V DC
3 Volt Lithium Coin Cell Battery (Type)	CR2032	CR2032	CR2032	CR2032
Suggested Service Flow Rate Range (GPM) <sup>2</sup>	1.00 - 3.74	1.50 - 5.61	2.00 - 7.48	3.00 - 11.22
Overall Height (Inches)	47.60	61.40	55.50	72.73
Mineral Tanks Size: Diameter x Height (Inches)	10 x 40	10 x 54	12 x 48	14 x 65
Bottom Distributor Type	Plate	Plate	Plate	Plate
Top Basket Distributor	Yes	Yes	Yes	Yes
Underbed Layer (Support Bedding)	No	No	No	No
Cubic Feet of Nitrate Selective Resin per Tank (LBS)	1.0 (44 LBS)	1.5 (66 LBS)	2.0 (88 LBS)	3.0 (132 LBS)
Brine Tank Size (Inches)	15 x 17 x 36 <sup>3</sup>	15 x 17 x 36 <sup>3</sup> (Salt Grid)	15 x 17 x 36 <sup>3</sup> (Salt Grid)	18 D x 40 H (Salt Grid)
Brine Tank Capacity (LBS Salt)	275	275	275	450
DLFC - Drain Line Flow Control (GPM) <sup>4</sup>	1.0	1.0	1.3	2.2
RFC - Brine Line (Re-Fill) Flow Control (GPM)	0.5	0.5	0.5	0.5
Injector (Color)	IE - White	IE - White	IF - Blue	IH - Green
Grains Capacity per Tank (Grains @ LBS Salt) <sup>5</sup>	8,000 @ 10.0	12,000 @ 15.0	16,000 @ 20.0	24,500 @ 30.0
Water to Drain at 50 PSI Inlet Pressure (Gallons)	47	49	65	101

<sup>1</sup>1.0 MNPT Elbow Standard - Options Available

<sup>2</sup>Service flow rates based on Nitrate Selective anion exchange resin standard design conditions - service flow rate range 8 - 30 BV/h.

<sup>3</sup>See Diagram

<sup>4</sup>DLFC sizes selected based on Nitrate Selective anion exchange resin standard design conditions - 50% backwash bed expansion at 4.5 m/h and 50°F.

<sup>5</sup>Grains Capacity is based on 8,241 grains per cubic foot as CaCO<sub>3</sub> operating capacity of Nitrate Selective anion exchange resin for nitrate removal at 10 pounds of NaCl per cubic foot with an influent concentration of 600 mg/L TDS (sulfate concentration of 265 mg/L). Programming grains capacity must be in increments of 500 grains.