


X-FACTOR SERIES TTLX SOFTENERS

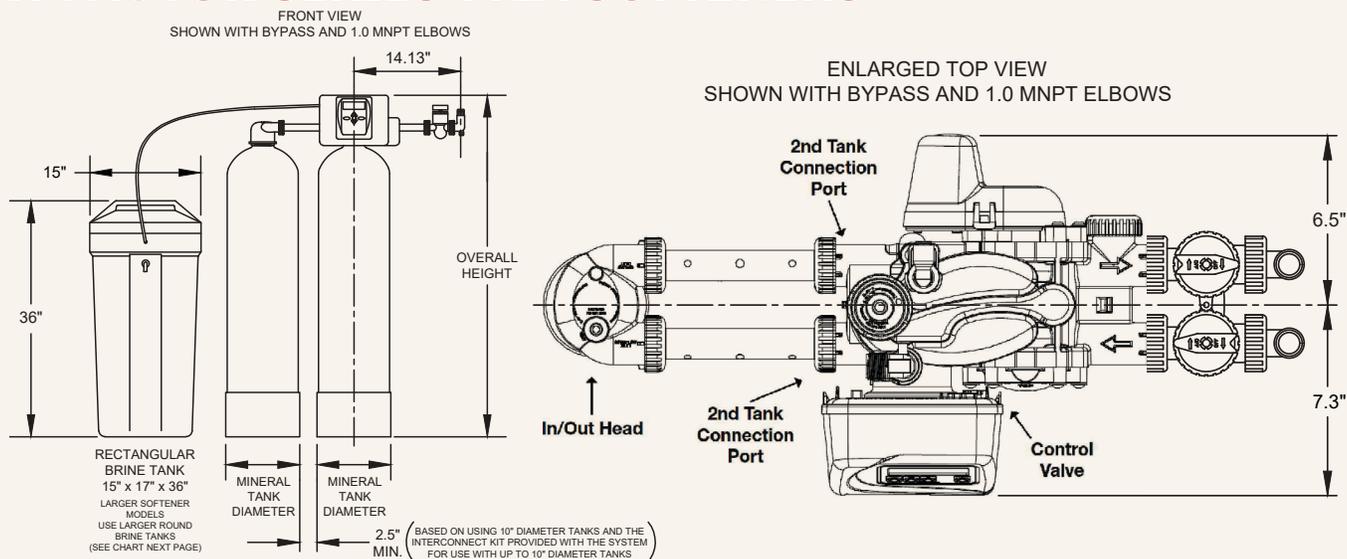

TTLX PROGRAM CYCLES ¹	WATER AVAILABLE TO SERVICE DURING REGENERATION	TWIN TANK SOFTENER									
		7-TTLX-150B		7-TTLX-200B		7-TTLX-300B		7-TTLX-400B		7-TTLX-600B	
Model Number		Minute	Gallon ²	Minute	Gallon ²	Minute	Gallon ²	Minute	Gallon ²	Minute	Gallon ²
1st: Fill - (Programmed in LBS salt)	Treated Water	4.00	2.00	5.33	2.67	8.00	4.00	10.67	5.33	16.00	8.00
		6.0 LBS		8.0 LBS		12.0 LBS		16.0 LBS		24.0 LBS	
2nd: Softening (Minutes)	Treated Water	240	0	240	0	240	0	240	0	240	0
3rd: Backwash (Minutes)	Treated Water	10	10	10	17	10	17	10	27	10	42
4th: Regenerant Draw DN & Slow Rinse (Minutes)	Treated Water	50	13.5	50	18.5	50	18.5	50	26	50	36
5th: Backwash (Minutes)	Treated Water	10	10	10	17	10	17	10	27	10	42
6th: Rinse (Minutes)	Treated Water	5	5	5	8.5	5	8.5	5	13.5	5	21
7th: End	-	-	-	-	-	-	-	-	-	-	-
DLFC - Drain Line Flow Control (GPM)	-	1.0		1.7		1.7		2.7		4.2	
Total Gallons to Drain ²	-	40.5		63.7		65.0		98.8		149.0	
Total Regeneration (Minutes)	-	319.0		320.3		323.0		325.7		331.0	
Total Time Untreated Water is Available to Service During Regeneration (Minutes)	-	0.0		0.0		0.0		0.0		0.0	

¹ Downflow Regenerant, Prefill Factory Program Settings

² Gallons to Drain Based on 50 PSI Inlet Pressure

X-FACTOR SERIES TTLX SOFTENERS

TTLX SPECIFICATIONS		TWIN TANK SOFTENER				
Model Number		7-TTLX-150B	7-TTLX-200B	7-TTLX-300B	7-TTLX-400B	7-TTLX-600B
Inlet/Outlet Fitting Options (Inches) ¹		0.75 - 1.0 ¹ - 1.25 - 1.5	0.75 - 1.0 ¹ - 1.25 - 1.5	0.75 - 1.0 ¹ - 1.25 - 1.5	0.75 - 1.0 ¹ - 1.25 - 1.5	0.75 - 1.0 ¹ - 1.25 - 1.5
Bypass Included		Yes	Yes	Yes	Yes	Yes
Drain Fit. Elb. NPT or OD Poly Tube Size (Inches)		3/4 NPT or 5/8 Tube				
Water Pressure Range (PSI)		20 - 100	20 - 100	20 - 100	20 - 100	20 - 100
Water Operating Temperature Range (°F)		35 - 100	35 - 100	35 - 100	35 - 100	35 - 100
Influent Maximum Water Hardness (GPG)		100	100	100	100	100
Influent Maximum Ferrous Iron (PPM) ²		0.5	0.5	0.5	0.5	0.5
Plug-In Power Adapter Input (VAC - Hz - A)		120V AC - 60Hz - 0.35A				
Plug-In Power Adapter Output (VDC - A)		15V DC - 0.5A				
Plug-In Power Adapter Cord Length		15 FT				
PC Board Relay Terminal Block DC Output (V)		12V DC				
3 Volt Lithium Coin Cell Battery (Type)		2032	2032	2032	2032	2032
Service Flow Rate at 15 PSI Pressure Drop (GPM) ³		13	17	16	18	19
Overall Height (Inches)		51.2	47.6	61.4	55.5	72.73
Mineral Tanks Size: Diameter x Height (Inches)		8 x 44	10 x 40	10 x 54	12 x 48	14 x 65
Bottom Distributor Type		Plate	Plate	Plate	Plate	Plate
Top Basket Distributor		Yes	Yes	Yes	Yes	Yes
Amount of Resin per Tank (Cubic Feet)		0.75	1.0	1.5	2.0	3.0
Brine Tank Size (Inches)		15 x 17 x 36 ⁴	15 x 17 x 36 ⁴	15 x 17 x 36 ⁴	18 D x 40 H	24 D x 50 H
Brine Tank Capacity (LBS Salt)		275	275	275	450	900
Drain Line Flow Control (GPM)		1.0	1.7	1.7	2.7	4.2
Brine Line (Re-Fill) Flow Control (GPM)		0.5	0.5	0.5	0.5	0.5
Injector (Color)		IC - Violet	IE - White	IE - White	IF - Blue	IH - Green
Grains Capacity (Grains @ LBS Salt)	High	24,000 @ 11.3	32,000 @ 15.0	48,000 @ 22.5	64,000 @ 30.0	96,000 @ 45.0
	Medium ⁵	18,000 @ 6.0	24,000 @ 8.0	36,000 @ 12.0	48,000 @ 16.0	72,000 @ 24.0
	Low	12,750 @ 3.4	17,000 @ 4.5	25,500 @ 6.75	34,000 @ 9.0	51,000 @ 13.5
Water to Drain at 50 PSI Inlet Pressure (Gallons)	High	42.3	66.0	68.5	103.3	156.0
	Medium ⁵	40.5	63.7	65.0	98.6	149.0
	Low	39.6	62.5	63.3	96.3	145.5

¹1.0 MNPT Elbow Standard - Options Available

²Ferrous iron ("clear-water iron"): Water comes out of the faucet clear, but turns red or brown after standing. Recommend HIGH grains capacity program settings; salt grid may be required - Consult Factory

³Flow rates in the table may exceed resin manufacturer's recommended maximum flow rates. Selecting a system flow rate by pressure drop alone does not guarantee that the system will provide softened water.

⁴See Diagram

⁵Factory Program Setting