




SURVIVOR[®] U-SERIES 15 GPM

SURVIVOR U-SERIES

PUMP DIAMETER
INCLUDING
CABLE GUARD
3.81"

PUMP END
DISCHARGE
1.25" FNPT

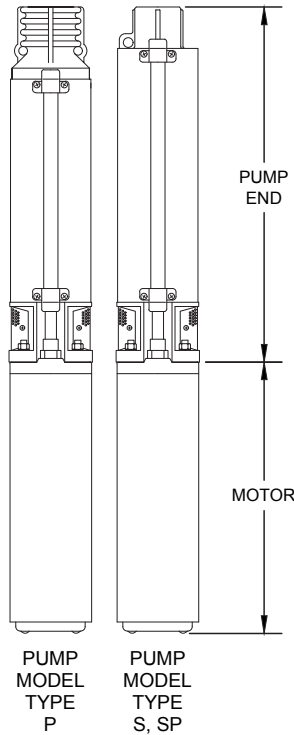

U SERIES - 15 GPM

60 Hz, 3450 rpm

Pump Model	HP	Pump End		Single-Phase Motors - 2-wire				Single-Phase Motors - 3-wire				Three-Phase Motors	
				LP Hydro-Force		FE Super Stainless		LP Hydro-Force		FE Super Stainless		FE Super Stainless	
		Length (inches)	Weight (LBS)	Length (inches)	Weight (LBS)	Length (inches)	Weight (LBS)	Length (inches)	Weight (LBS)	Length (inches)	Weight (LBS)	Length (inches)	Weight (LBS)
PU7506 SU7506 SPU7506	3/4	12.78	4.2 6.8 5.4	11.69	22.0	10.66	21	10.50	20.2	10.66	21	10.66	21
PU10008 SU10008 SPU10008	1	14.53	4.8 7.7 6.1	12.44	24.1	11.75	24	12.12	23.9	11.75	24	11.75	24
PU15011 SU15011 SPU15011	1-1/2	17.22	6.4 8.9 7.7	15.25	29.7	15.12	31	n/a	n/a	13.62	28	11.75	24
SU20014	2	19.92	10.1	n/a	n/a	n/a	n/a	n/a	n/a	15.12	33	13.62	28
SU30018	3	24.53	12.3	n/a	n/a	n/a	n/a	n/a	n/a	19.06	41	16.06	35
SU50029	5	34.44	17.5	n/a	n/a	n/a	n/a	n/a	n/a	29.20	71	23.20	56

General notes for estimating only.

All Single-Phase motors are 230 Volt (FE Super Stainless 1/2 HP available 115 Volt OR 230 Volt).

Single-Phase 3-wire motors require properly matched control box.

Three-Phase motors available: 200 OR 230 OR 460 Volt.

Three-Phase motors require a magnetic starter with three leg Class 10 overload protection.

