




LANCASTER

WATER TREATMENT

DIAMOND LINE LX125F-CT - ESTATE CARBON FILTERS

X-FACTOR SERIES LX125F-CT ESTATE CARBON FILTERS

OUTLET SIDE VIEW
SHOWN WITH BYPASS
AND 1.25 MNPT
ASSEMBLY

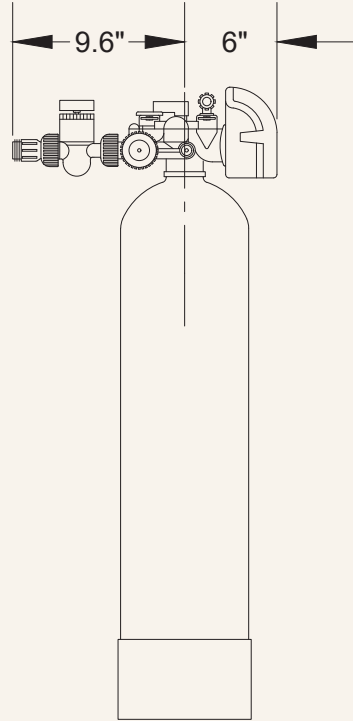

FRONT VIEW



LX125F-CT PROGRAM CYCLES*	ESTATE CARBON FILTER					
	7-LX125F-CT-2B		7-LX125F-CT-3B		7-LX125F-CT-4B	
Model Number						
Units:	Minutes	Gallons	Minutes	Gallons	Minutes	Gallons
1st Cycle: Backwash	10	100	10	100	10	150
2nd Cycle: Rinse	5	50	5	50	5	75
3rd Cycle: End	-	-	-	-	-	-
Total Gallons to Drain	150		150		225	
Total Minutes	15		15		15	
Days Between Backwash**	7		7		7	

*Factory Program Settings. To adjust cycle programming, consult factory.

**Factory Program Setting. Days between backwash can be field adjusted based on local conditions. Refer to manual.

X-FACTOR SERIES LX125F-CT ESTATE CARBON FILTERS

LX125F-CT SPECIFICATIONS				ESTATE CARBON FILTER		
Model Number				7-LX125F-CT-2B	7-LX125F-CT-3B	7-LX125F-CT-4B
Inlet/Outlet Fitting Options (Inches)¹				0.75 - 1.0 - 1.25 ¹ - 1.5	0.75 - 1.0 - 1.25 ¹ - 1.5	0.75 - 1.0 - 1.25 ¹ - 1.5
Bypass Included				Yes	Yes	Yes
Drain Fitting Elbow NPT (Inches)				3/4 NPT	3/4 NPT	1" NPT Straight Fitting
Water Pressure Range (PSI)				20 - 100	20 - 100	20 - 100
Water Operating Temperature Range (°F)				35 - 100	35 - 100	35 - 100
Plug-In Power Adapter Input (VAC - Hz - A)				120V AC - 60Hz - 0.35A	120V AC - 60Hz - 0.35A	120V AC - 60Hz - 0.35A
Plug-In Power Adapter Output (VDC - A)				15V DC - 0.5A	15V DC - 0.5A	15V DC - 0.5A
Plug-In Power Adapter Cord Length (FT)				15 FT	15 FT	15 FT
PC Board Relay Terminal Block DC Output (V)				12V DC	12V DC	12V DC
3 Volt Lithium Coin Cell Battery (Type)				2032	2032	2032
Amount of Carbon (Cubic Feet)²				2	3	4
Service Flow Rates (GPM)³	Recommended	Organics		2	3	4
		Chlorine	RO FEED	4	6	8
			Commercial	6	9	12
	Typical	Continuous		4.6	5.4	7.0
		Intermittent (Peak)		9.2	10.7	14.0
	Overall Height (Inches)				55.3	72.73
Mineral Tank Size: Diameter x Height (Inches)				13 x 48	14 x 65	16 x 65
Bottom Distributor Type				Plate	Plate	Plate
Top Basket Distributor				No	No	No
Underbed Layer				No	No	No
Drain Line Flow Control (GPM)				10	10	15
Water to Drain (Gallons)				150	150	225

¹1.25 MNPT Standard - Options Available

²Mineral used: Coconut Shell-High Activated Carbon (CS-HAC). Used for removal of chlorine, color, taste, odor and low levels of sulfur, etc. One of the most common applications for Carbon is the reduction of the undesirable tastes and odors present in many chlorinated water supplies. Upon installation allow bed to soak overnight before backwashing. The mineral bed should be backwashed periodically, but will in time reach the maximum adsorbency. Carbon has an extremely high capacity but must be replaced when the filter bed loses the capacity for reduction of taste and odor.

³**Basis for Service Flow Rates:**

Continuous - 5 GPM/SQ. FT.

Intermittent (Peak) - 10 GPM/SQ. FT.

Chlorine:

RO Feed - 2 GPM/CU. FT.

Commercial - 3 GPM/CU. FT.

Organics: 1 GPM/CU. FT.

Higher flow rates are possible, however lower flow rates produce higher quality water.